Screw Technical Specifications

DRIVE TYPE


COMBISLOT


POST TORX







IMPERIAL

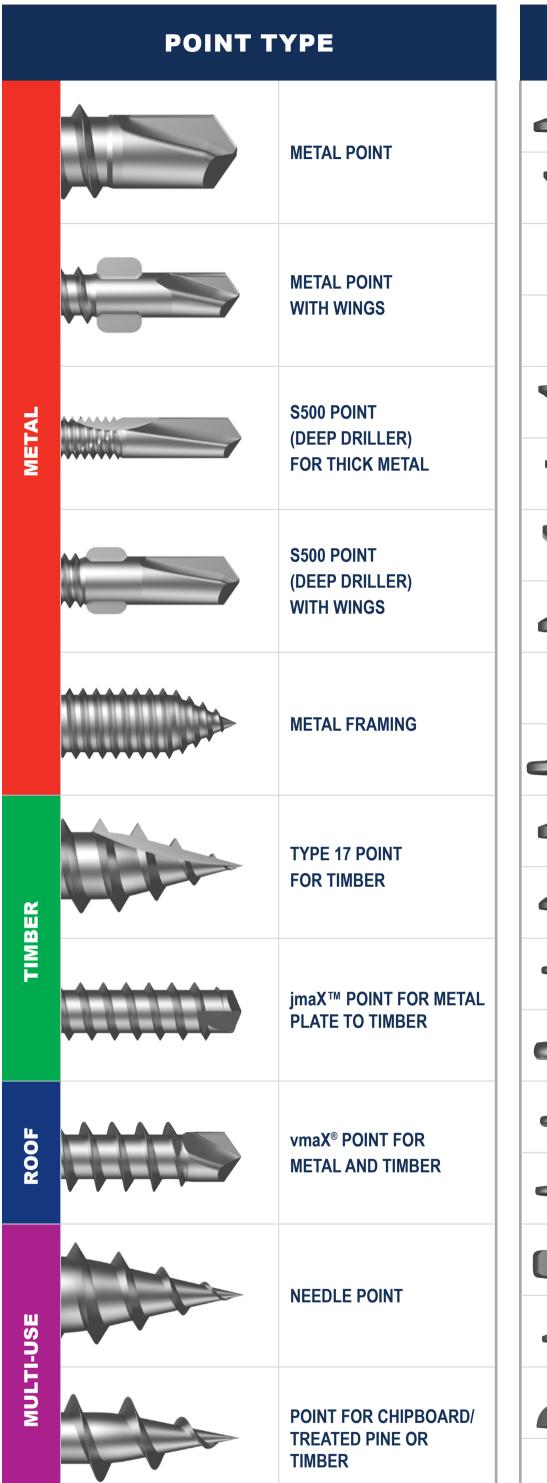

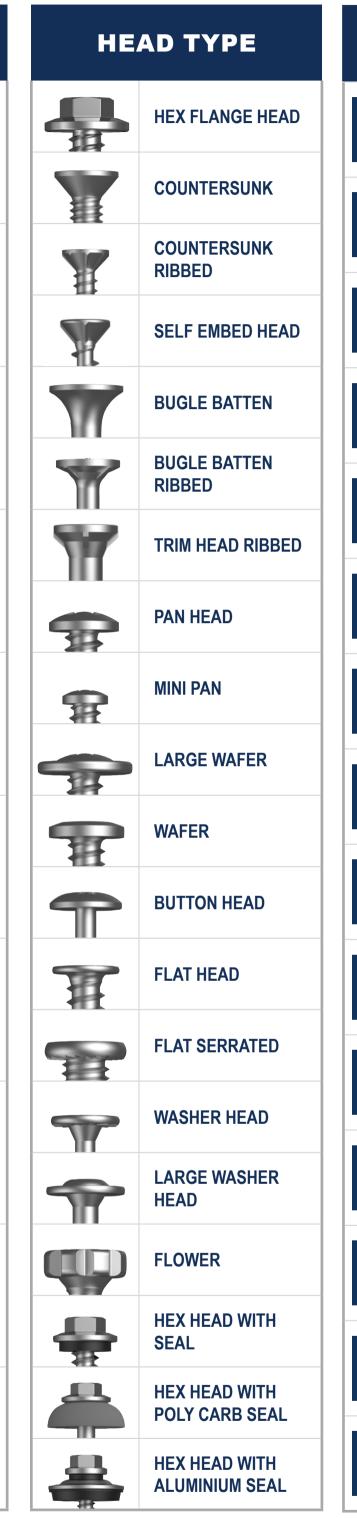

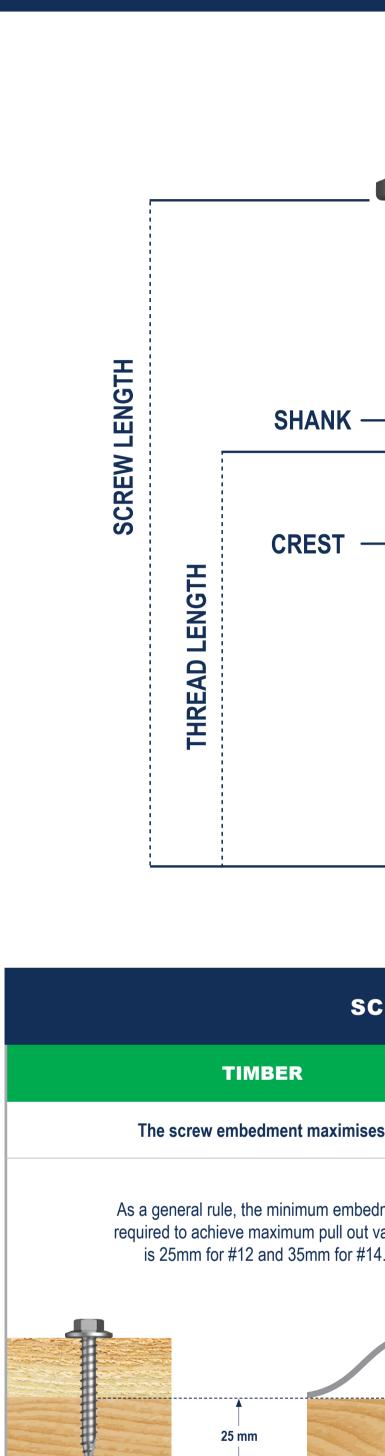

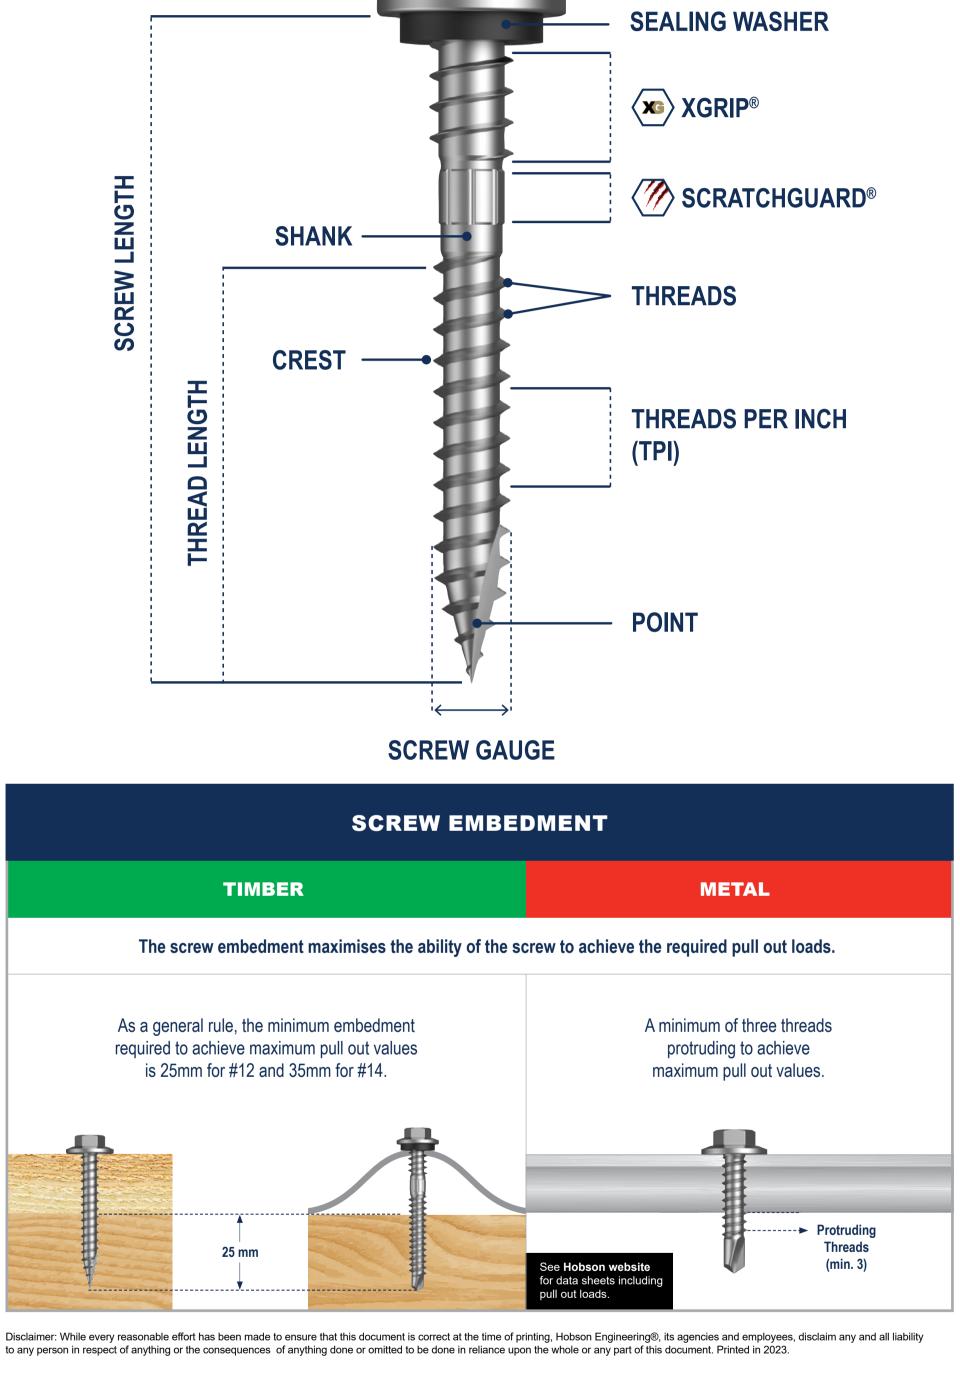

HEAD

				S	CRE	N GA	UGE	& LEI	NGTH					
gauge	0	1	2	3	4	5	6	7	8	10	12	14	16	18
mm	1.5	1.9	2.2	2.6	2.9	3.3	3.5	3.9	4.2	4.8	5.5	6.3	7.1	7.7
inch	0.060"	0.073"	0.086"	0.099"	0.112"	0.125"	0.138"	0.151"	0.164"	0.190"	0.216"	0.242"	0.280"	0.303"





Screw heads are available in Colorbond® colours

All of your favourite fasteners are now available in handy hang packs.



."	
-	
."	
)" -	
•	
."	_
."	
)" -	
•	
."	
."	
<u>.</u>	
."	
	=
."	==
•	
<u>.</u>	
."	
•	
."	
•	
<u>.</u>	_
."	
•	
,"	
•	
gn -	
on n	
on n	
, n	
, n	
2" "" "" "" "" "" "" "" "" "" ""	
2" "" "" "" "" "" "" "" "" "" ""	
2" "" "" "" "" "" "" "" "" "" ""	
2"	
2"	
2"	
2"	
2"	
2"	
2"	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" 4" 4" 4" 4" 4" 4"	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	
2" "" "" "" "" "" "" "" "" "" "" "" "" "	

----- 7"

_____ 8"

APPLICATION

For fastening roof sheeting to thin metal battens, timber trusses and steel purlins up to 1.9mm thick.

For self-drilling and fixing

metal plate to timber without **E-COAT**

PROTECTION

Reduces friction

during installation

moderate corrosion

and provides

protection.

performance coating, specially formulated for resisting treated pine chemicals

•

ALL-IN-1

Metal SDS ALL-IN-1 Poly-carbonate roofing screw with sealing washer and expansion hole cutter.




Comprised of two metal types. Stainless steel head and high carbon steel point.

FEATURE




roofing tight against the seal, even when the roof is walked





forces of modern power tools. general purpose applications.



DECKING

304/A2 stainless steel, **special** point, cut and thread, and No.1 square drive.



